

e-Stable Active tabletop isolators [mini series]

NEW

e-Stable MINI



Realization of improved performance.
New display and design, pursued usability

Typical applications

AFMs, SPMs, laser microscopes, micro-hardness testers, interferometers



MINI-560F



MINI-450F

Features



Active vibration isolation in all six degrees of freedom

- Outstanding anti-vibration effects over the entire frequency band, without resonance



Self-leveling & Clamping

- With the push of a button, it allows for auto-leveling and clamping during transit.



LCD monitor standard equipment

- Sprung acceleration time waveforms display
- Sprung power spectrum display



USB interface

- By USB interface, you're sure to observe the vibration condition and to clamp by remote control.




Clean room-compatible design

- No air contamination
- No air needed

Specifications

With active vibration isolation in all six degrees of freedom, you can get outstanding anti-vibration effects.

■ Performance (mini-450)

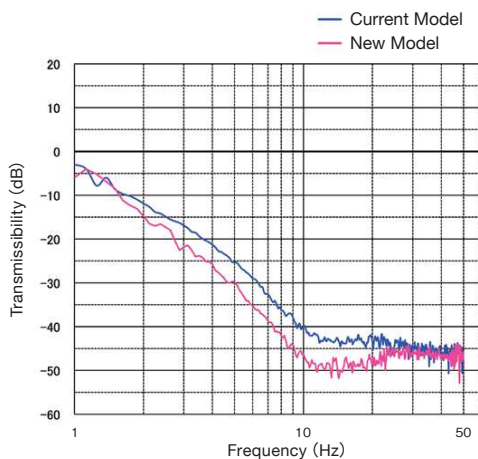

	MINI-450F	MINI-560F
size(W×D×Hmm)	400×500×80	500×600×84
maximumload(kg) [※]	120	100
weight(kg)	19	28
power supply	AC85-264V single-phase50/60Hz	

※ in loading evenly